


INTREX SET 2402 PLUS LABELLING SYSTEM

.....> LABELLING CYLINDRICAL AND OVAL PRODUCTS WITH 2 LABELS

- Universal solution for cylindrical and oval products
- Wide product dimension range
- Includes roller separator providing required product spacing for double side labelling
- Pneumatic separator in front of 3-reel module providing product spacing while maintaining high capacity
- Intrex SMART Panel - touch-screen based control panel with clear and easy to use GUI
- Capacity of up to 200 p/min for double-side labelling and up to 60 p/min for wraparound labelling
- Hi precision label application
- Optional label orientation for wraparound labelling
- Top grip belt ensuring firm and stable product handling
- The machine can be integrated with production line or work as a standalone unit
- Easy and quick changeover
- Machine built on rigid, welded frame
- Machine can be upgraded with various types of code and date printers

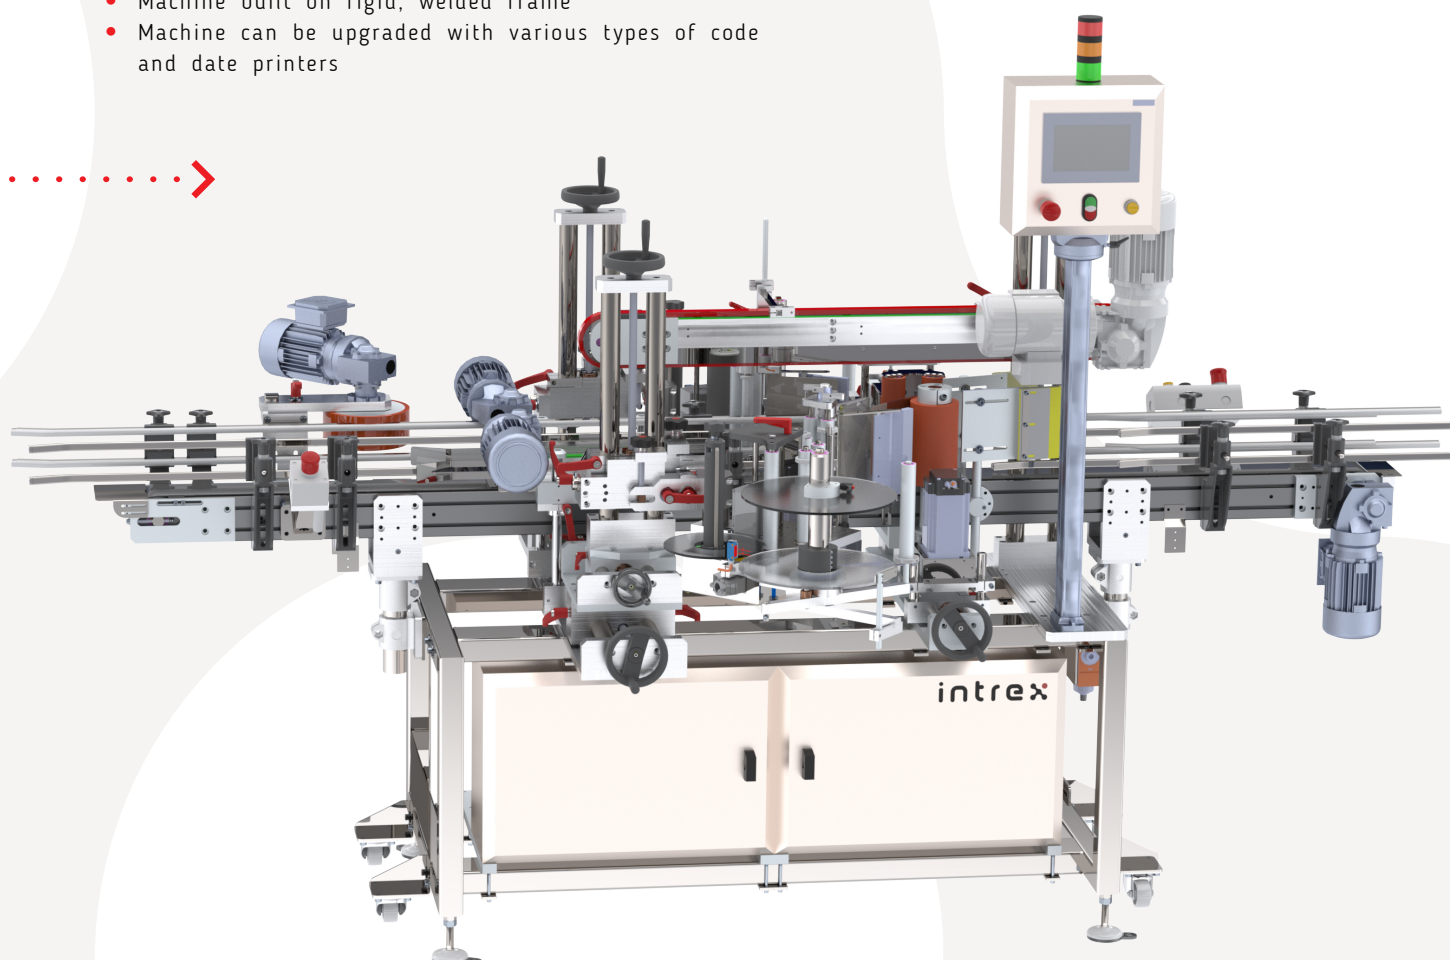



The real maximum labelling speed depends on the label, capacity, type of the labelled product and the kind of application.
The label feeding precision depends on the label and the labelled product properties.



PARAMETERS

INTREX SET 2402 PLUS

	Wrap around labelling	Double side labelling
LABELLING HEAD	INTREX 100+	INTREX 100+
MAX LABEL WIDTH	90/160mm	90/160mm
MAX LABEL ROLL OUTER DIAMETER	300mm (option: 350mm)	
LABEL SENSOR	Optical (option: ultrasonic for transparent labels)	
MAX CAPACITY	Up to 60 p/min	Up to 200 p/min
PRODUCT WIDTH	Ø 30-100mm	
CONTROL	Intrex SMART Panel – intuitive user graphic interface	
CONVEYOR	Belt conveyor, 100mm wide, 2500mm long. (custom dimensions available)	
OPTIONAL MODULES	TTO printer bracket, Ink-jet printer printhead support	
POWER SUPPLY	230 VAC, 50 Hz	

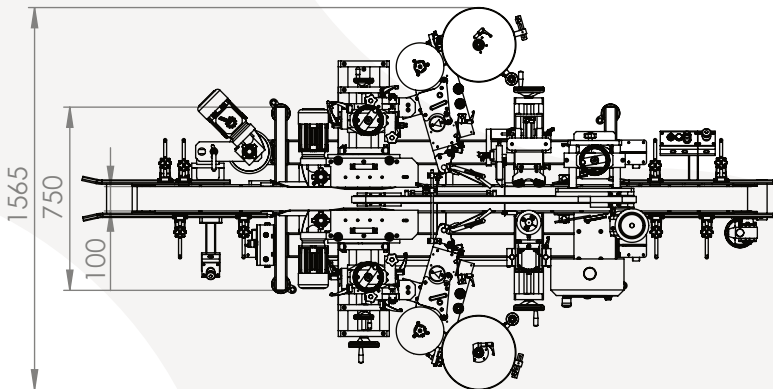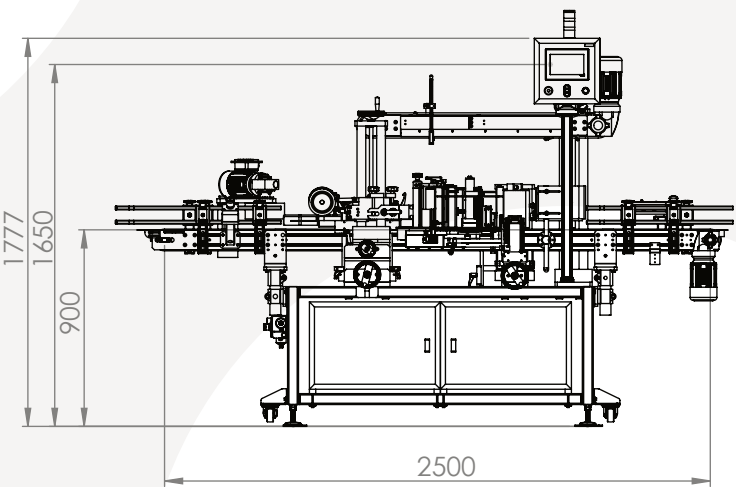

The real maximum labelling speed depends on the label, capacity, type of the labelled product and the kind of application.
The label feeding precision depends on the label and the labelled product properties.

